

Camera Track System

CTS-S2

A Member of the Camera Track System Family of Products

Get on Track




Features:

- »Smooth Operating Variable Speed
- »Servo Controlled
- »Programmable Timed Presets Start and
- »Stop all Axes Simultaneously
- »Lightweight Aluminum Track
- »In-line Cable Trolleys or Comparison Cable Track
- »Upright or Inverted Mounting
- »Direct Drive Trolley


Camera Track System

CTS-S2

A Member of the Camera Track System Family of Products

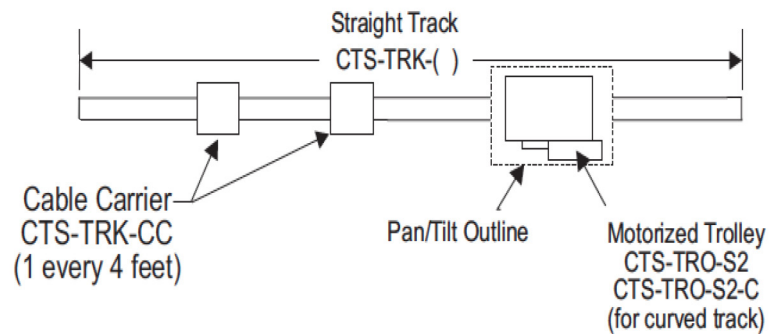




() = Standard 10' lengths customized to desired total length in feet

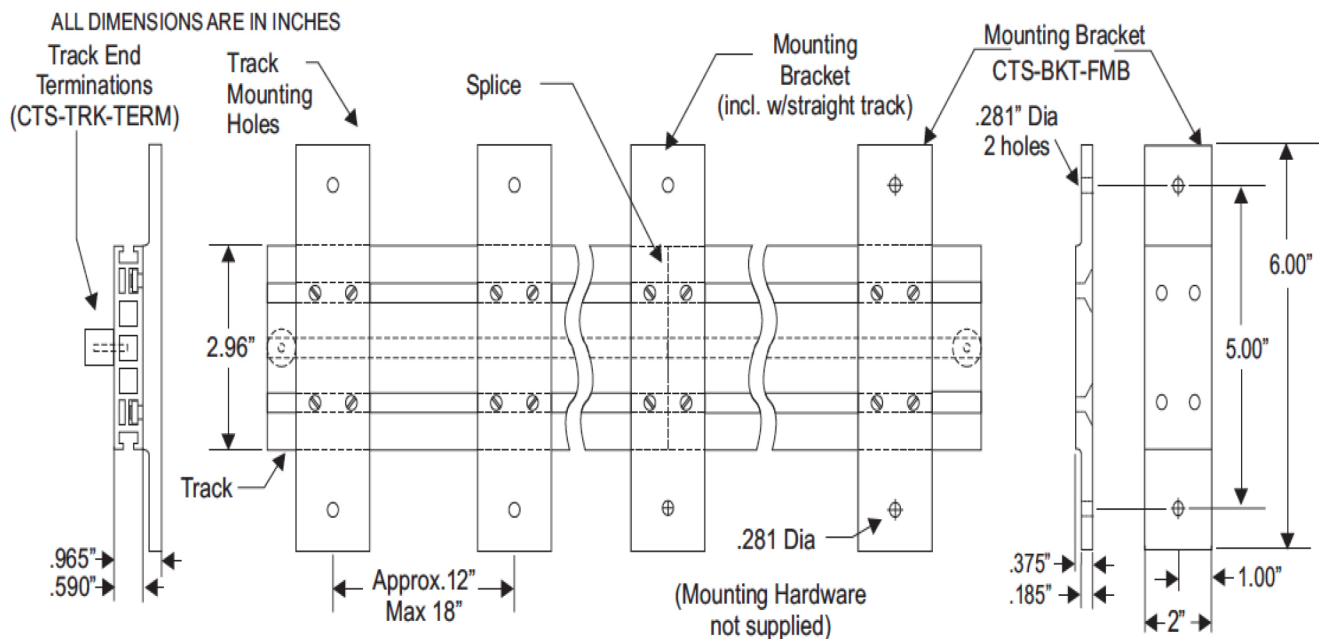

Camera Track System

CTS-S2

A Member of the Camera Track System Family of Products

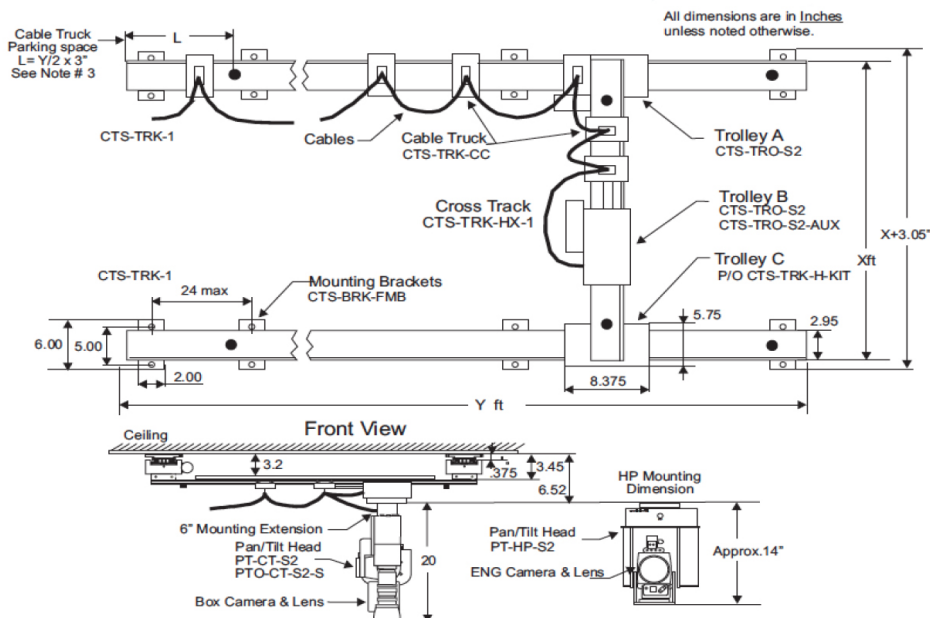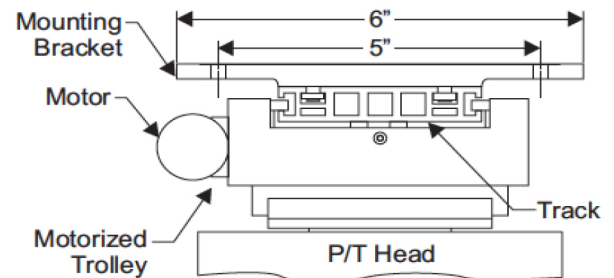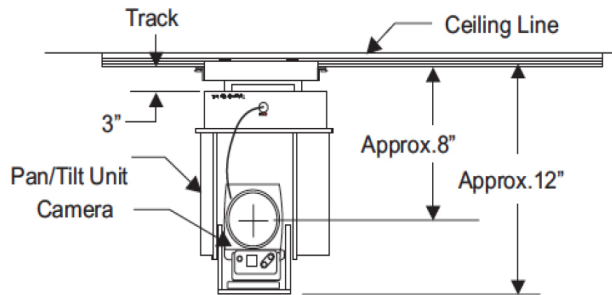

Specifications

Input Voltage	0-24VDC
End Stops	Adjustable
Min. Speed	.045 ft/sec
Max. Speed	.467 ft/sec (High Speed Option available: 1.58 ft/sec)
Trolley Load	50lbs
Weight	Track: 1lb/ft Trolley: 6 lbs (not including P/T Head)

Specifications and features subject to change without notice

Ordering Information

Model Number	Description
CTS-TRO-S2	CTS Trolley
CTS-TRK-CC	CTS Cable Carriers
CTS-TRK-1	CTS Track (per foot)
CTS-BKT-FMB	CTS Bracket Flat Mounting
CTS-BKT-BRCs	CTS Bracket BRC to Trolley
CTS-PT-EXT	CTS EXT Pan/Tilt Head Mounting
CTS-TRK-H-COMP	CTS 'H' Track Components
CTS-TRK-HX1	CTS 'H' Track with Support 1