

Televator[®] Elevating Pedestal

EP6M-400 & EP6M-700

A Member of the Televator[®] Family of Products



Features:

» Versatile

Ceiling or floor mounting. Variable speed control for smooth acceleration/deceleration. Virtual set ready.

» Choice of sizes

EP6M-400 & EP6M-700

» Compatible

Designed for the PTZ camera market. Works seamlessly with TeleGlide systems and enables coordinated pedestal/trolley/pan/tilt moves in an all-Telemetrics system.


» Efficient

Accurate, absolute positional servo. Smooth quiet operation. Maximize space in small studios. Auxiliary control bus interface.

Televator[®] Elevating Pedestal

EP6M-400 & EP6M-700

A Member of the Televator[®] Family of Products

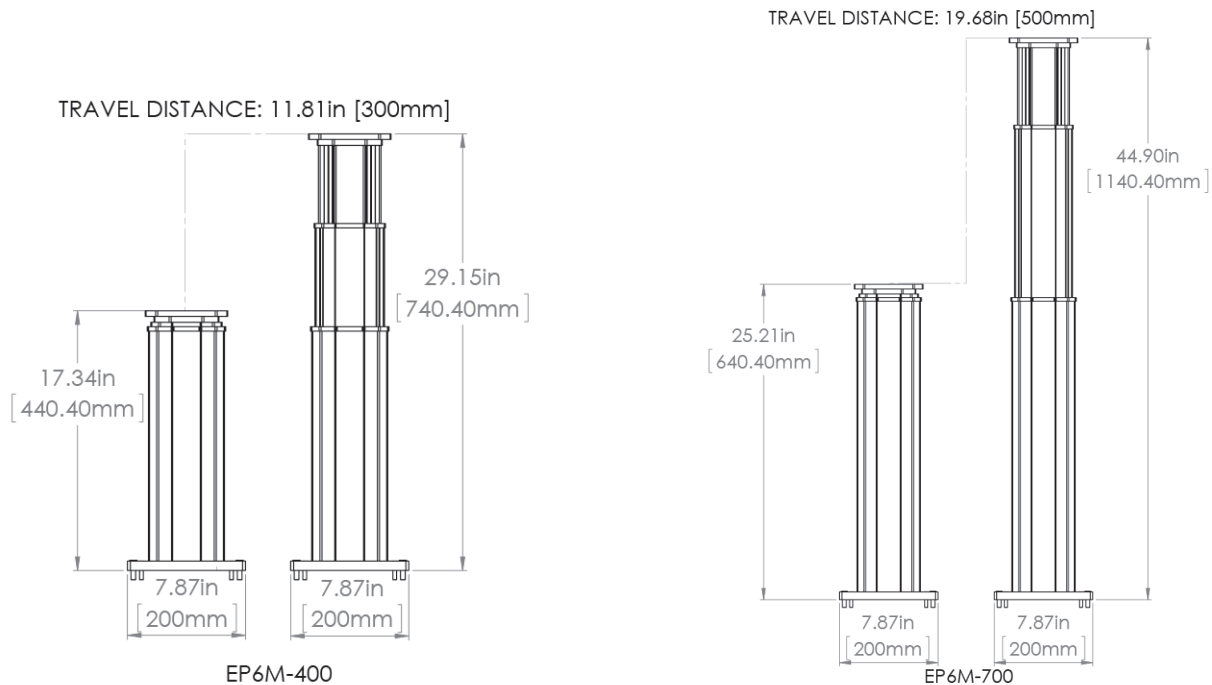

Specifications	
Speeds	Min Speed: 0.1"/Sec (2.5mm/Sec) Max Speed: 1.5"/Sec (38mm/Sec)
Maximum Load	60lbs (27kg)
Maximum Power	120 Watts

Specifications and features subject to change without notice

MODEL	MIN HEIGHT	MAX HEIGHT	TRAVEL RANGE	WEIGHT
EP6M-400	17.5" (443mm)	29.3" (743mm)	11.8" (300mm)	48lbs (22kg)
EP6M-700	25.5" (643mm)	45" (1143mm)	19.7" (500mm)	53 lbs (24kg)

Ordering Information	
MODEL NUMBER	DESCRIPTION
EP6M-400	EP-6M-400 Televator Elevating Pedestal
EP6M-700	EP-6M-700 Televator Elevating Pedestal
EP-FFD	EP Folding Floor Dolly
MA-EP6M-LP-S5	Mounting Adapter Plate
MA-EP6M-FFD	Mounting Adapter Plate
VSI-XYZ	XYZ Virtual Studio Interface